


How-to: Automatic Terms of Access

The SHRINE Web Client has a built in feature where an announcement will appear upon user log in, that has to be acknowledged by the user in order for them to continue the log in process. This is a good option for a Terms of Access message that requires the user to accept before proceeding to their SHRINE Web Client session.

This announcement displays simple html in a prompt box. This prompt box includes two buttons: "Yes, I agree" and "No, I disagree".

Example i2b2 Web Client Announcement

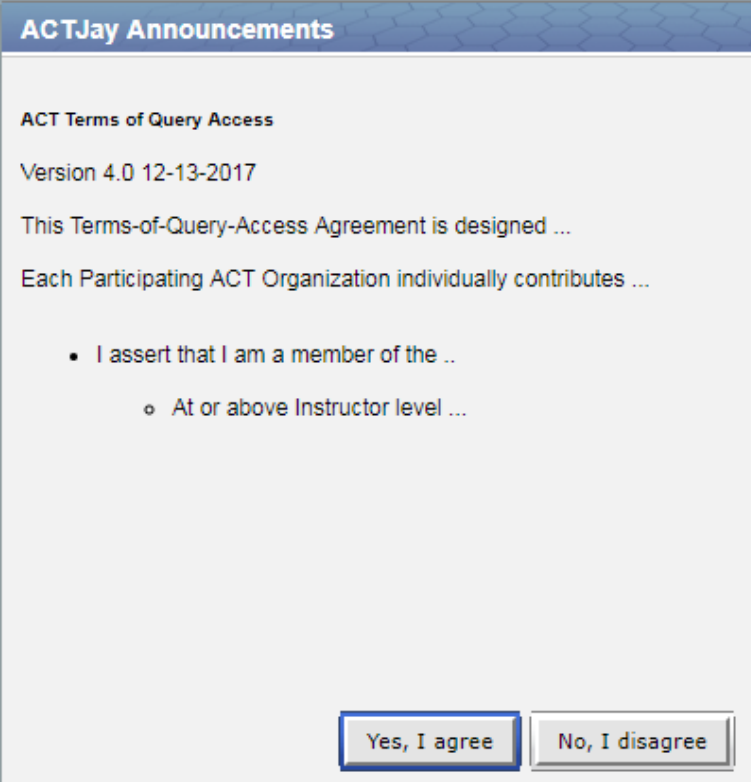

The screenshot shows a dialog box titled "ACTJay Announcements". Inside, the text reads: "ACT Terms of Query Access", "Version 4.0 12-13-2017", "This Terms-of-Query-Access Agreement is designed ...", and "Each Participating ACT Organization individually contributes ...". Below this is a bulleted list: "• I assert that I am a member of the .." followed by "◦ At or above Instructor level ...". At the bottom are two buttons: "Yes, I agree" and "No, I disagree".

Steps

1. Create simple html that contain the TOA text. Or you can add a link to a document that contains the TOA text
2. Place this html in a div with a height of 325px and overflow auto. This will place scroll bars when needed
3. Replace all of the <, >, and " with <, >, and "
4. Remove all newlines (\n,\r) from the html. All the text has to be on one line
5. Invoke the pm:set_project_param PM service to add announcement project parameter for your SHRINE ACT project

Example html from Steps 1-2

```

<div style='overflow:auto;height:325px;'>
  <h5>ACT Terms of Query Access</h5>
  Version 4.0 12-13-2017
  <br>
  <br>
  <div>
    This Terms-of-Query-Access Agreement is designed ...
    <br>
    <br> Each Participating ACT Organization individually contributes ...
    <br>
    <br>
    <ul>
      <li>I assert that I am a member of the ..</li>
      <br>
      <ul>
        <li>At or above Instructor level ...</li>
        <br>
      </ul>
    </ul>
  </div>
</div>

```

Example formatted text from Steps 3-4

```

&lt;div style='overflow:auto;height:325px;'&gt;      &lt;h5&gt;ACT Terms of Query Access&lt;
/h5&gt;      Version 4.0 12-13-2017      &lt;br&gt;      &lt;br&gt;      &lt;div&gt;      This
Terms-of-Query-Access Agreement is designed ...      &lt;br&gt;      &lt;br&gt; Each
Participating ACT Organization individually contributes ...      &lt;br&gt;      &lt;
br&gt;      &lt;ul&gt;      &lt;li&gt;I assert that I am a member of the ..&lt;
/li&gt;      &lt;br&gt;      &lt;ul&gt;      &lt;li&gt;At or above
Instructor level ...&lt;/li&gt;      &lt;br&gt;      &lt;/ul&gt;      &lt;
/ul&gt;      &lt;/div&gt;  &lt;/div&gt;

```

Example PM Service Request from Step 5

```

<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<i2b2:request xmlns:i2b2="http://www.i2b2.org/xsd/hive/msg/1.1/" xmlns:pm="http://www.i2b2.org/xsd/cell
/pm/1.1/">
  <message_header>
    <proxy>
      <redirect_url>http://localhost:9090/i2b2/services/PMService/getServices</redirect_url>
    </proxy>
    <i2b2_version_compatible>1.1</i2b2_version_compatible>
    <hl7_version_compatible>2.4</hl7_version_compatible>
    <sending_application>
      <application_name>i2b2 Project Management</application_name>
      <application_version>1.6</application_version>
    </sending_application>
    <sending_facility>
      <facility_name>i2b2 Hive</facility_name>
    </sending_facility>
    <receiving_application>
      <application_name>Project Management Cell</application_name>
      <application_version>1.6</application_version>
    </receiving_application>
    <receiving_facility>
      <facility_name>i2b2 Hive</facility_name>
    </receiving_facility>
    <datetime_of_message>2018-04-27T11:28:22-04:00</datetime_of_message>
    <security>
      <domain>your i2b2 domain</domain>
      <username>REG_SERVICE</username>
      <password>your service account password</password>
    </security>
    <message_control_id>
      <message_num>79ZhBR5PG4m3AUAS1X2Dr</message_num>
      <instance_num>0</instance_num>
    </message_control_id>
    <processing_id>
      <processing_id>P</processing_id>
      <processing_mode>I</processing_mode>
    </processing_id>
    <accept_acknowledgement_type>AL</accept_acknowledgement_type>
    <application_acknowledgement_type>AL</application_acknowledgement_type>
    <country_code>US</country_code>
    <project_id></project_id>
  </message_header>
  <request_header>
    <result_waittime_ms>180000</result_waittime_ms>
  </request_header>
  <message_body>
    <pm:set_project_param id="ACTJay" >
      <project_path>your i2b2 SHRINE ACT project path</project_path>
      <param datatype="T" name="announcement">&lt;div style='overflow:auto;height:325px;'&gt;      &lt;h5&gt;
      ACT Terms of Query Access&lt;/h5&gt;      Version 4.0 12-13-2017      &lt;br&gt;      &lt;br&gt;
      &lt;div&gt;      This Terms-of-Query-Access Agreement is designed ...      &lt;br&gt;
      &lt;br&gt;      Each Participating ACT Organization individually contributes ...      &lt;
      br&gt;      &lt;br&gt;      &lt;ul&gt;      &lt;li&gt;I assert that I am a member of
      the ..&lt;/li&gt;      &lt;br&gt;      &lt;ul&gt;      &lt;li&gt;At or
      above Instructor level ...&lt;/li&gt;      &lt;br&gt;      &lt;/ul&gt;      &lt;/ul&gt;
      &lt;/div&gt;      &lt;/div&gt;</param>
    </pm:set_project_param>
  </message_body>
</i2b2:request>

```

Example PM Service Response from Step 5

```
<ns2:response xmlns:ns2="http://www.i2b2.org/xsd/hive/msg/1.1/" xmlns:ns4="http://www.i2b2.org/xsd/cell
/pm/1.1/" xmlns:ns3="http://www.i2b2.org/xsd/hive/msg/version/">
  <message_header>
    <i2b2_version_compatible>1.1</i2b2_version_compatible>
    <hl7_version_compatible>2.4</hl7_version_compatible>
    <sending_application>
      <application_name>PM Cell</application_name>
      <application_version>1.700</application_version>
    </sending_application>
    <sending_facility>
      <facility_name>i2b2 Hive</facility_name>
    </sending_facility>
    <receiving_application>
      <application_name>PM Cell</application_name>
      <application_version>1.700</application_version>
    </receiving_application>
    <receiving_facility>
      <facility_name>i2b2 Hive</facility_name>
    </receiving_facility>
    <datetime_of_message>2018-05-02T11:41:22.050-04:00</datetime_of_message>
    <message_control_id>
      <message_num>79ZhBR5PG4m3AUAS1X2Dr</message_num>
      <instance_num>1</instance_num>
    </message_control_id>
    <processing_id>
      <processing_id>P</processing_id>
      <processing_mode>I</processing_mode>
    </processing_id>
    <accept_acknowledgement_type>AL</accept_acknowledgement_type>
    <application_acknowledgement_type>AL</application_acknowledgement_type>
    <country_code>US</country_code>
    <project_id />
  </message_header>
  <response_header>
    <result_status>
      <status type="DONE">PM processing completed</status>
    </result_status>
  </response_header>
  <message_body>
    <ns4:response>1 records</ns4:response>
  </message_body>
</ns2:response>
```