

GIRI Home

GIRI (Generic integration of R into i2b2)

Author: [Bastian Weinlich](#)

Short Description

The project follows a similar goal as the "R Engine Cell" of the University of Pavia and [rgate \(HERON\)](#) of the University of Kansas: To make arbitrary R functions available within i2b2. In contrast to these approaches, it is very simple to add new statistical functionality with GIRI. To do so, it is sufficient to write an R script and an optional XML configuration file to add what is known as a "Scriptlet" (a kind of an addon) that comprises one or more R functions. In particular, it is not necessary to implement an i2b2 webclient plugin for every newly added scriptlet individually. The end user simply selects the desired scriptlet from a drop down list from a generic i2b2 webclient plugin and has then several options to customize the input data (e.g. drag and drop patient sets / concepts). Afterwards, he clicks on "View Results" to start computations. The following results page can - depending on the scriptlet - consist of numerical / textual values, tables and plots. Additionally, all data can be exported as files.

Examples


A simple scriptlet could compute two quantiles of age from a previously selected patient set. The end user can define the p values. Here is a step-by-step guide to using the scriptlet:

Specify the input data:

The screenshot shows the GIRIPlugin interface with the following elements:

- Navigation tabs: "Choose scriptlet", "View Results", "Help".
- Scriptlet selection: "Please choose a GIRI scriptlet: Quantiles of age" (with a dropdown arrow). A note says "Choose between several previously written scriptlets".
- Section: "Quantiles of age".
- Instruction: "Please select a patient set and fill in two values for p."
- Section: "Drag and drop fields:". A red button says "Click here to clear fields". A note says "Define input data by dragging and dropping patient sets and concepts".
- Fields: "Circula-Male@18:51:46 [4]" (highlighted in green), "Concept 1", and "Patient Set 2".
- Section: "Additional input settings". A note says "Type in additional parameters to customize the computation".
- Field: "p for lower quantile" with a value of "0.02". Instruction: "Fill in a numeric value between 0.0 and 1.0, e.g. 0.05".
- Field: "p for upper quantile" with a value of "0.98". Instruction: "Fill in a numeric value between 0.0 and 1.0, e.g. 0.95".

Afterwards click on "View Results" to start the computation:

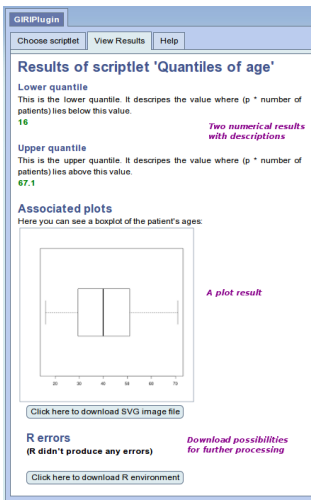

The scriptlet consists of two files that have to be stored on the server where the GIRI Cell is running. The first one is the R script including the following R code:

mainscript.r

```
GIRI.output["Lower quantile"] <- quantile(GIRI.patients[[1]]$age_in_years_num, as.numeric(GIRI.input[["p for lower quantile"]]))
GIRI.output["Upper quantile"] <- quantile(GIRI.patients[[1]]$age_in_years_num, as.numeric(GIRI.input[["p for upper quantile"]]))
boxplot(GIRI.patients[[1]]$age_in_years_num, horizontal=T)
```

Accessing input and output is possible by using special naming conventions (GIRI.patients, GIRI.input, GIRI.output...). Plots are always displayed.

The second file configures the R scriptlet through XML code:


config.xml

```
<?xml version="1.0" encoding="UTF-8"?>
<giriconf:Rscriptlet xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xmlns:giriconf="http://www.i2b2.org/xsd/cell/giriconf/1.0/">
  <settings>
    <title>Quantiles of age</title>
    <description>Please select a patient set and fill in two values for p.</description>
    <passROutput>false</passROutput>
    <passRErrors>true</passRErrors>
    <plotDescription>Here you can see a boxplot of the patient's ages:</plotDescription>
  </settings>
  <additionalInputs>
    <input>
      <name>p for lower quantile</name>
      <description>Fill in a numeric value between 0.0 and 1.0, e.g. 0.05</description>
      <type>text</type>
      <lines>1</lines>
    </input>
    <input>
      <name>p for upper quantile</name>
      <description>Fill in a numeric value between 0.0 and 1.0, e.g. 0.95</description>
      <type>text</type>
      <lines>1</lines>
    </input>
  </additionalInputs>
  <customOutputs>
    <output>
      <name>Lower quantile</name>
      <description>This is the lower quantile. It describes the value where (p * number of
patients) lies below this value.</description>
    </output>
    <output>
      <name>Upper quantile</name>
      <description>This is the upper quantile. It describes the value where (p * number of
patients) lies above this value.</description>
    </output>
  </customOutputs>
</giriconf:Rscriptlet>
```

Settings, input variables and outputs are defined in this configuration file. For more information about creating scriptlets see the [notes for scriptlet developers](#).

The following slide show depicts a scriptlet that computes a Kaplan Meier plot:

Kaplan Meier Example

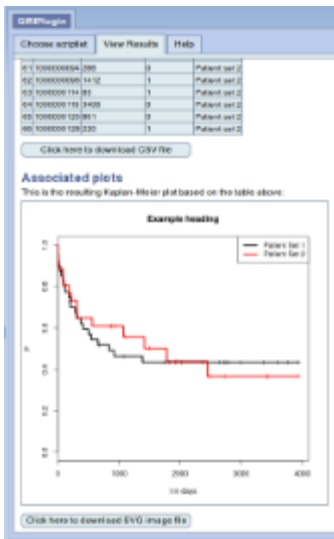

Choose scriptlet View Results Help

Kaplan-Meier-input-table
Following data was computed from database (0 means censored, 1 means not censored)

Patient	Time in days	Censored	Group
1-1-1000000000000000	0	1	Patient set 1
1-1-1000000000000000	100	0	Patient set 1
1-1-1000000000000000	200	1	Patient set 1
1-1-1000000000000000	300	0	Patient set 1
1-1-1000000000000000	400	0	Patient set 1
1-1-1000000000000000	500	1	Patient set 1
1-1-1000000000000000	600	0	Patient set 1
1-1-1000000000000000	700	0	Patient set 1
1-1-1000000000000000	800	0	Patient set 1
1-1-1000000000000000	900	0	Patient set 1
1-1-1000000000000000	1000	1	Patient set 1
1-1-1000000000000000	1100	0	Patient set 1
1-1-1000000000000000	1200	0	Patient set 1
1-1-1000000000000000	1300	1	Patient set 1
1-1-1000000000000000	1400	0	Patient set 1
1-1-1000000000000000	1500	0	Patient set 1
1-1-1000000000000000	1600	0	Patient set 1
1-1-1000000000000000	1700	0	Patient set 1
1-1-1000000000000000	1800	0	Patient set 1
1-1-1000000000000000	1900	0	Patient set 1
1-1-1000000000000000	2000	1	Patient set 1
1-1-1000000000000000	2100	0	Patient set 1
1-1-1000000000000000	2200	0	Patient set 1
1-1-1000000000000000	2300	0	Patient set 1
1-1-1000000000000000	2400	0	Patient set 1
1-1-1000000000000000	2500	0	Patient set 1
1-1-1000000000000000	2600	0	Patient set 1
1-1-1000000000000000	2700	0	Patient set 1
1-1-1000000000000000	2800	0	Patient set 1
1-1-1000000000000000	2900	0	Patient set 1
1-1-1000000000000000	3000	0	Patient set 1
1-1-1000000000000000	3100	0	Patient set 1
1-1-1000000000000000	3200	0	Patient set 1
1-1-1000000000000000	3300	0	Patient set 1
1-1-1000000000000000	3400	0	Patient set 1
1-1-1000000000000000	3500	0	Patient set 1
1-1-1000000000000000	3600	0	Patient set 1
1-1-1000000000000000	3700	0	Patient set 1
1-1-1000000000000000	3800	0	Patient set 1
1-1-1000000000000000	3900	0	Patient set 1
1-1-1000000000000000	4000	0	Patient set 1
1-1-1000000000000000	4100	0	Patient set 1
1-1-1000000000000000	4200	0	Patient set 1
1-1-1000000000000000	4300	0	Patient set 1
1-1-1000000000000000	4400	0	Patient set 1
1-1-1000000000000000	4500	0	Patient set 1
1-1-1000000000000000	4600	0	Patient set 1
1-1-1000000000000000	4700	0	Patient set 1
1-1-1000000000000000	4800	0	Patient set 1
1-1-1000000000000000	4900	0	Patient set 1
1-1-1000000000000000	5000	0	Patient set 1
1-1-1000000000000000	5100	0	Patient set 1
1-1-1000000000000000	5200	0	Patient set 1
1-1-1000000000000000	5300	0	Patient set 1
1-1-1000000000000000	5400	0	Patient set 1
1-1-1000000000000000	5500	0	Patient set 1
1-1-1000000000000000	5600	0	Patient set 1
1-1-1000000000000000	5700	0	Patient set 1
1-1-1000000000000000	5800	0	Patient set 1
1-1-1000000000000000	5900	0	Patient set 1
1-1-1000000000000000	6000	0	Patient set 1
1-1-1000000000000000	6100	0	Patient set 1
1-1-1000000000000000	6200	0	Patient set 1
1-1-1000000000000000	6300	0	Patient set 1
1-1-1000000000000000	6400	0	Patient set 1
1-1-1000000000000000	6500	0	Patient set 1
1-1-1000000000000000	6600	0	Patient set 1
1-1-1000000000000000	6700	0	Patient set 1
1-1-1000000000000000	6800	0	Patient set 1
1-1-1000000000000000	6900	0	Patient set 1
1-1-1000000000000000	7000	0	Patient set 1
1-1-1000000000000000	7100	0	Patient set 1
1-1-1000000000000000	7200	0	Patient set 1
1-1-1000000000000000	7300	0	Patient set 1
1-1-1000000000000000	7400	0	Patient set 1
1-1-1000000000000000	7500	0	Patient set 1
1-1-1000000000000000	7600	0	Patient set 1
1-1-1000000000000000	7700	0	Patient set 1
1-1-1000000000000000	7800	0	Patient set 1
1-1-1000000000000000	7900	0	Patient set 1
1-1-1000000000000000	8000	0	Patient set 1
1-1-1000000000000000	8100	0	Patient set 1
1-1-1000000000000000	8200	0	Patient set 1
1-1-1000000000000000	8300	0	Patient set 1
1-1-1000000000000000	8400	0	Patient set 1
1-1-1000000000000000	8500	0	Patient set 1
1-1-1000000000000000	8600	0	Patient set 1
1-1-1000000000000000	8700	0	Patient set 1
1-1-1000000000000000	8800	0	Patient set 1
1-1-1000000000000000	8900	0	Patient set 1
1-1-1000000000000000	9000	0	Patient set 1
1-1-1000000000000000	9100	0	Patient set 1
1-1-1000000000000000	9200	0	Patient set 1
1-1-1000000000000000	9300	0	Patient set 1
1-1-1000000000000000	9400	0	Patient set 1
1-1-1000000000000000	9500	0	Patient set 1
1-1-1000000000000000	9600	0	Patient set 1
1-1-1000000000000000	9700	0	Patient set 1
1-1-1000000000000000	9800	0	Patient set 1
1-1-1000000000000000	9900	0	Patient set 1
1-1-1000000000000000	10000	0	Patient set 1

Choose scriptlet View Results Help

Please choose a GRI scriptlet:
Kaplan-Meier

Kaplan-Meier
Usage information: Drag and drop exactly one risk concept (e.g. a concept diagnosed on the "Concept 1" field. Afterwards a "Concept 2" field will appear. Please use this "Concept 2" field to drag and drop exactly one target concept (e.g. deceased) on it. Then drag and drop as many patient sets you wish to compare among each other on the left fields. In doing so make sure that all members of this set have the risk concept. Example: Use the query tool to obtain patient set A "50 female patients having breast cancer and being older than 50 years" and patient set B "All female patients having breast cancer and being younger than 50 years". Drag and drop these patient sets from the "Previous Query" box below to the left fields below in the scriptlet window. Then drag and drop "Breast cancer" on "Concept 1" as risk concept and "Deceased" on "Concept 2" as target concept. "Concept 3" and further concept fields will be ignored here. Finally specify the plot parameters below and click on "View result".

Drag and drop fields:

Circulatory system
Digestive system
Patient Set 3
Concept 3

Additional input settings
Plot heading:
Example heading

Colorful or black-white plot graphics?
Colorful
Black-white

Choose scriptlet View Results Help

Please choose a GRI scriptlet:
Kaplan-Meier

Kaplan-Meier
Usage information: Drag and drop exactly one risk concept (e.g. a concept diagnosed on the "Concept 1" field. Afterwards a "Concept 2" field will appear. Please use this "Concept 2" field to drag and drop exactly one target concept (e.g. deceased) on it. Then drag and drop as many patient sets you wish to compare among each other on the left fields. In doing so make sure that all members of this set have the risk concept. Example: Use the query tool to obtain patient set A "50 female patients having breast cancer and being older than 50 years" and patient set B "All female patients having breast cancer and being younger than 50 years". Drag and drop these patient sets from the "Previous Query" box below to the left fields below in the scriptlet window. Then drag and drop "Breast cancer" on "Concept 1" as risk concept and "Deceased" on "Concept 2" as target concept. "Concept 3" and further concept fields will be ignored here. Finally specify the plot parameters below and click on "View result".

Drag and drop fields:

Circulatory system
Digestive system
Patient Set 3
Concept 3

Additional input settings
Plot heading:
Example heading

Colorful or black-white plot graphics?
Colorful
Black-white

Downloads

The download package contains the GRI Cell, the GRI webclient plugin, install notes, notes for scriptlet developers and example scriptlets. This version is dedicated for i2b2 version 1.7.02 (does not work with 1.7.01!).

[giri_i2b2_project_v1.1.zip](#)